

VEGA

142UV-02 S3S FO HRO SR ESD

STANDARD EN ISO 20345:2022+A1:2024


SIZES 36-47



Three-dimensional **SPYDER-NET**: lining with moisture absorption and release properties. Its special three-dimensional structure provides exceptional shape memory and high snag-resistance

Bi-component **TYRE PU/Rubber Vibram®** sole: direct injected Esolight 1.0 polyurethane midsole and rubber Vibram® outsole. The S-line design facilitates the movement of the foot while the lugged profile guarantees lightness and durability

SUPREMOIL highly breathable full-grain leather, extremely soft, resistant to water, oils and hydrocarbons

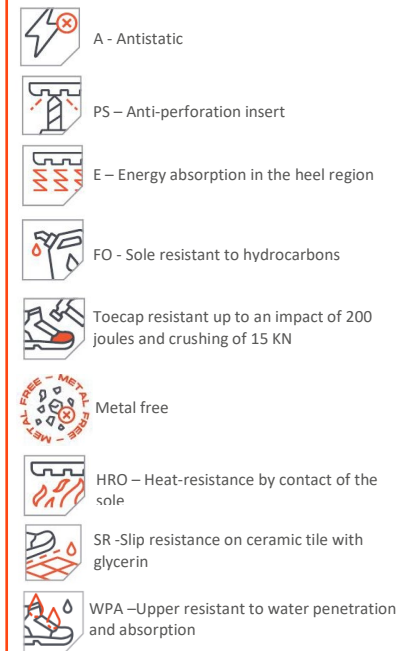

Esolight 1.0 polyurethane midsole. The low-density polyurethane microcells enhance energy absorption ensuring comfort and lightness

Puntale in fibra di vetro **PZ88** ed inserto resistente alla perforazione **TX ZERO STRONG** con fibre ad alta tenacità per offrire una tessitura flessibile, che si adatta al movimento del piede ed intrinsecamente antistatica



TYRE bi-component PU/RUBBER Vibram®

- Resistant to hydrocarbons
- Excellent abrasion resistance
- Lugged sole for better grip on stairs
- Vibram® Rubber HRO tread heat-resistant
- Sole profiling for maximum ground grip



T-01

- Anatomical insole for increased comfort
- High-density foam = energy absorption and rebound
- Lining made from conductive micro-perforated fabric to reduce wear and tear