

MANAUS

169UV-02 S3 WR HRO SRC

STANDARD EN ISO 20345:2011

SIZES 36-47



Breathable and water-resistant **GORE-TEX** Stretch Safety Footwear membrane: it allows the natural foot thermoregulation providing unparalleled comfort and water-resistance




X-Weave high tenacity nylon upper with differential weave areas. Extremely flexible and breathable; abrasion- and tear-resistant

Bi-component **TYRE PU/Rubber Vibram®** sole: direct injected Esolight 1.0 polyurethane midsole and rubber Vibram® outsole. The S-line design facilitates the movement of the foot while the lugged profile guarantees lightness and durability



TYRE bi-component PU/RUBBER Vibram®

- Resistant to hydrocarbons
- Excellent abrasion resistance
- Lugged sole for better grip on stairs
- Vibram® Rubber HRO tread heat-resistant
- Sole profiling for maximum ground grip

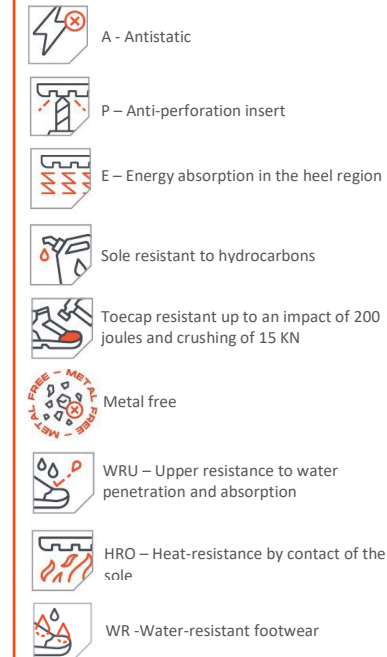

Esolight 1.0 polyurethane midsole. The low-density polyurethane microcells enhance energy absorption ensuring comfort and lightness

PZ88 fiberglass toe cap and **TXZERO** multi-layer textile anti puncture insole for exceptional lightness, protection and flexibility



T-01

- Anatomical insole for increased comfort
- High-density foam = energy absorption and rebound
- Lining made from conductive micro-perforated fabric to reduce wear and tear