

SIGFRID

203BB-01 S3S SC FO LG SR

STANDARD EN ISO 20345:2022+A1:2024

SIZES 37-50



Reflective material

Dual density **ICON PU/PU** sole designed to offer maximum comfort, slip resistance, excellent performances across all terrains, from wet to dry conditions. It has been tested in SATRA laboratories to resist slipping on metal grates (Kennedy Grating Test) and wooden boards (Scaffold Board Test)




SATRA
TECHNOLOGY

Dual density ICON PU/PU

- Resistant to hydrocarbons
- Antistatic sole (A)
- Non-slip sole suitable for use on metal and wooden grates - SATRA Tests
- Self-cleaning profile to ensure maximum ground grip
- Wide fit for maximum stability and protection
- Shock-absorbing heel

Three-dimensional **SPYDER-NET**: lining with moisture absorption and release properties. Its special three-dimensional structure provides exceptional shape memory and high snag-resistance

IDROTECH fullgrain leather upper, resistant to water penetration and absorption

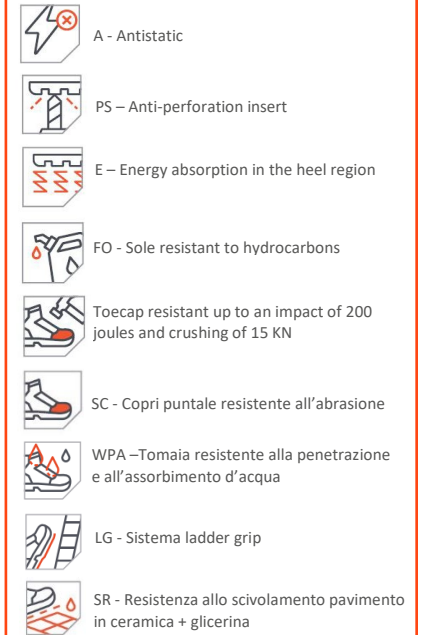

Esolight 1.0 polyurethane midsole. The low-density polyurethane microcells enhance energy absorption ensuring comfort and lightness

PZX fiberglass toe cap and **TXZERO** multi-layer textile anti puncture insole for exceptional lightness, protection and flexibility



T-01

- Anatomical insole for increased comfort
- High-density foam = energy absorption and rebound
- Lining made from conductive micro-perforated fabric to reduce wear and tear