

SUMATRA

269U-007 S3S FO SR ESD

STANDARD EN ISO 20345:2022

SIZES 35-49



Three-dimensional **SPYDER-NET**: lining with moisture absorption and release properties. Its special three-dimensional structure provides exceptional shape memory and high snag-resistance

Soft Lycra collar



BOA® Fit System: an adjustable micro-dial, ultra-strong lightweight laces and a low-friction lace guide. Designed for easv. precise and secure adjustment

PU-Tek Green: breathable recycled fabric, water-and abrasion-resistant

Bi-component **TYRE PU-TPU** sole designed to offer maximum flexibility and durability. The thermoplastic outsole ensures remarkable mechanical features without affecting lightness and abrasion resistance



TYRE bicomponente PU/TPU


- High-density design to ensure maximum ground support
- Long flow channels for excellent sole cleaning
- Uniform heel lugs to ensure an efficient cushioning effect

ALU200 aluminium toe cap and **TXZERO STRONG** anti puncture insole made of high tenacity fibers to obtain a flexible textile that adapts to the movement of the foot; it is intrinsically antistatic



B-01

- Anatomical insole made of polyurethane compound for improved comfort
- TPE charge system for an even distribution of energy
- Lining with through-holes to increase air circulation

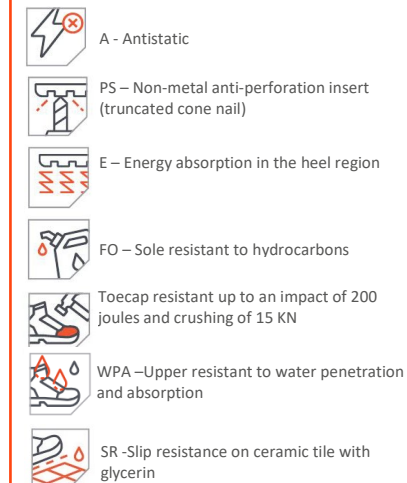

Ultralight and flexible sole thanks to Smart Injection: this special technology combines the mold construction with the injection process of the PU Esolight 2.0 compound and allows to achieve different PU-densities guaranteeing lightness, flexibility and durability