

## SONORA

### 916P-018 S3 HI HRO SRC

STANDARD EN ISO 20345:2011

SIZES 38-48



Three-dimensional **SPYDER-NET**: lining with moisture absorption and release properties. Its special three-dimensional structure provides exceptional shape memory and high snag-resistance

Reflective material

Bi-component **HYBRID PU/RUBBER** polyurethane and rubber sole, designed to provide maximum performance in terms of safety and comfort. The sole has been tested in SATRA laboratories for slip resistance on metal grates and wooden boards



#### HYBRID bicomponente PU/GOMMA


- Resistant to hydrocarbons
- Self-cleaning and enhanced lugs for maximum ground grip
- Non-slip sole suitable for use on metal and wooden grates - SATRA Tests
- Antistatic sole
- Rubber HRO tread heat-resistant

Supplementary TPU protection elements applied to the collar and front of the footwear to provide increased protection against impacts and friction

**SBX SYSTEM**: TPU stabilizer designed to wrap the ankle ensuring perfect balance control while walking

**SUPREMOIL** highly breathable full-grain leather, extremely soft, resistant to water, oils and hydrocarbons

Stainless **STEEL** toe cap and **TXZERO** multi-layer textile anti puncture insole for exceptional lightness, protection and flexibility

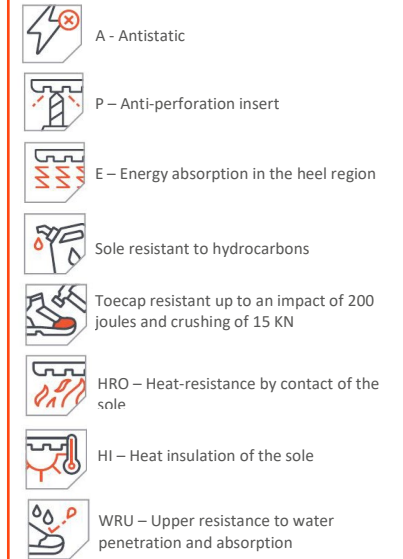

Esolight 1.0 polyurethane midsole. The low-density polyurethane microcells enhance energy absorption ensuring comfort and lightness

#### T-01

- Anatomical insole for increased comfort
- High-density foam = energy absorption and rebound
- Lining made from conductive micro-perforated fabric to reduce wear and tear