



MODUL-ZERO

213U-001 S1P ESD SRC
 Standard EN ISO 20345:2011
 Sizes 36 - 47

BOA®

BOA® FIT SYSTEM:
 a micro-adjustable dial, a super-strong lightweight lace and low friction lace guides, engineered for effortless precision delivering a connected, fast, customized and durable fit.

	SRC Slip resistant
	A Antistatic
	P Perforation resistance
	Resistant to 200 joules
	E Energy Absorption of seat region
	FO Fuel oil resistant sole

Three-dimensional Spyder-net lining: high performance tight-knit three-dimensional structure textile gives an exceptional comfort and keeps the feet dry.

Tx-Micro upper: technical textile, with the support of a strong, durable and extremely breathable microfiber.

Double density polyurethane sole Tyre Pu-Pu SRC designed to offer maximum flexibility and lightness.

Soft suede leather Velourtech on toe and heel.




Maximum lightness and flexibility with Smart Injection, special moulding technology to obtain the Esolight compound, with high abrasion resistance. This process allows to get an exceptionally lighter and thinner outsole, thus giving an excellent flexibility.

PZ88 Fiberglass toe cap (200 Joule) and perforation resistant Txzero insole made of ultimate textile material, offering outstanding lightness, protection and flexibility.

Outsole TYRE PU/PU

- SRC Slip resistant outsole.
- Cleated profile for highest grip to the ground.
- FO Fuel resistance.
- Maximum lightness and flexibility thanks to the use of Smart Injection.
- Excellent abrasion resistance.

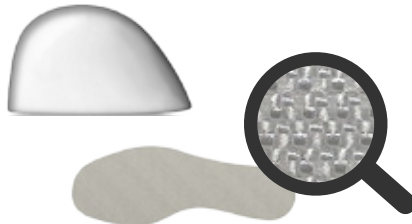

Tyre · T-01

- Anatomic footbed for improved comfort.
- Diversified zones with cushioning effect.
- Conductive lining to reduce foam wearing.
- High density foam = Support and shock absorption.

