




ARCO

171BB-05 S1P ESD SRC

Standard EN ISO 20345:2011

Sizes 37-47

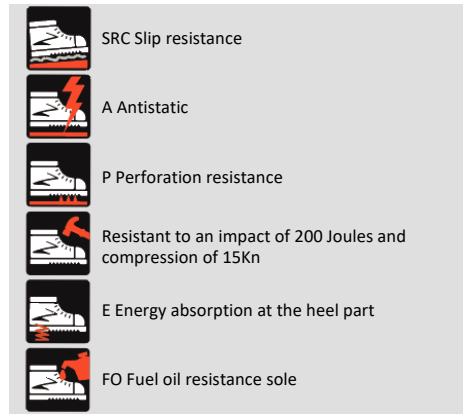

Three-dimensional Spyder-Net lining with moisture absorption and release properties. Its special three-dimensional and non-deformable textile structure ensures lasting comfort, breathability and elasticity.

Upper in PU and mesh fabric joined with Overwelding technology, a process that allows to combine different materials thanks to the high frequency welding.

ICON dual density polyurethane sole designed for excellent performance on wettest and driest grounds. This sole has been tested for slip-resistance in the SATRA laboratories on metal grating and wood scaffold board.



ICON DUAL DENSITY PU

- SRC Slip resistance sole.
- Self-cleaning cleated sole
- Fuel oil resistance sole
- Wide fit for maximum stability and protection.

PZX fiberglass toe cap and anti-puncture Txzero textile insert for extreme lightness, protection and flexibility.



X-Leather, leather upper material reinforced with polyurethane multi-layer, high abrasion resistant.

Esolight 1.0 polyurethane midsole with reinforced Over cap. The low-density micro-cell polyurethane increase energy absorption, while the outsole is made by high-density Esolight 2.0 polyurethane to guarantee durability and slip resistance.

T-01

- Anatomic insole for more comfort
- Supporting PU foam = Dissipation and Energy Return
- Fully lined with conductive micro-perforated fabric to reduce foam wearing

