



MIURA

245U-003 S1P SRC


Standard EN ISO 20345:2011

Sizes 35-48



Three-dimensional Spyder-Net lining with moisture absorption and release properties. Its special three-dimensional and non-deformable textile structure ensures lasting comfort, breathability and elasticity.

TYRE dual density PU guaranties excellent flexibility and lightness.

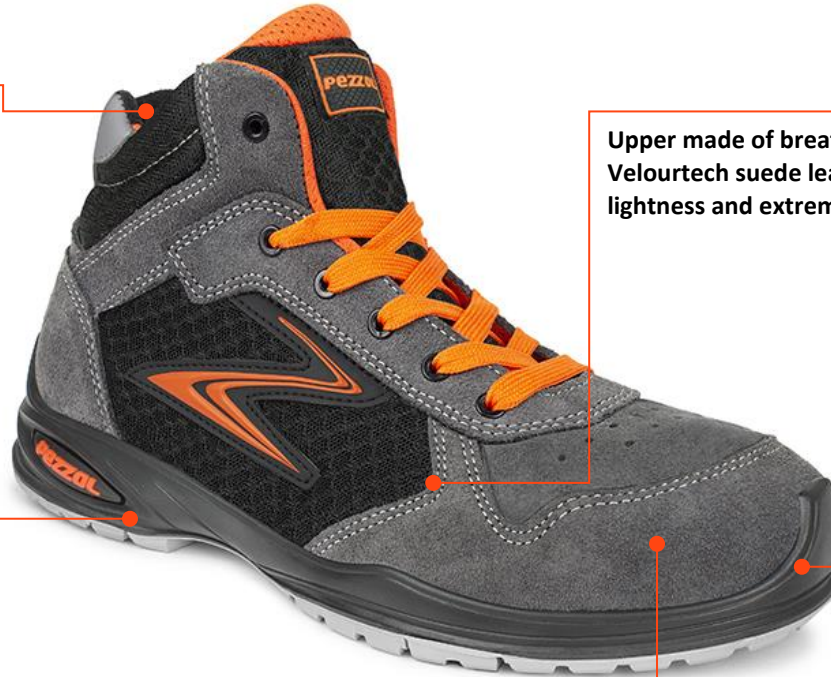

Upper made of breathable fabric and soft Velourtech suede leather for maximum lightness and extreme breathability.

Ultra-light and flexible sole with Smart Injection: a special technology that, through the combination of a peculiar mold build-up and the injection of PU Esolight 2.0 compound, provides for different densities and at the same time guaranties lightness, flexibility and durability.

	SRC Slip resistance
	A Antistatic
	P Perforation resistance
	Resistant to an impact of 200 Joules and compression of 15Kn
	E Energy absorption at the heel part
	FO Fuel oil resistance sole



TYRE PU DUAL DENSITY

- SRC Slip resistance sole.
- Fuel oil resistance sole (FO)
- Smart Injection technology
- Excellent abrasion resistance

Alu200 aluminum toe cap and anti-puncture Txzero textile insert for extreme lightness, protection and flexibility.



T-01

- Anatomic insole for more comfort
- Supporting PU foam – Dissipation and Energy Return
- Fully lined with conductive micro-perforated fabric to reduce foam wearing