



## NEVADA

987M-014 S3 CI HRO SRC

Standard EN ISO 20345:2011

Sizes 38-46

Thinsulate® B400 is a lightweight and thin lining material for outstanding thermal insulation, that keeps the feet warm in extreme weather conditions.

Two-component VINTAGE PU-RUBBER VIBRAM® sole, guarantees maximum grip and stability on difficult uneven grounds.



### VINTAGE PU-RUBBER VIBRAM®

- Outsole Rubber Vibram® HRO
- Large self-cleaning cleats
- High slip resistance
- Energy absorption at the heel part




The tunnel loops guarantee a quick and easy fit.

Full grain Idrotech leather with high water resistance properties.

Maximum stability and durability thanks to TPU protective element in the heel area.

COMPO200 polymeric toe cap anti-puncture Txzero textile insert for extreme lightness, protection and flexibility.

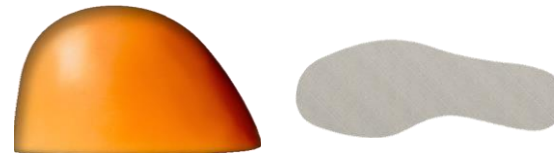

	SRC Slip resistance
	A Antistatic
	P Perforation resistance
	Resistant to an impact of 200 Joules and compression of 15Kn
	E Energy absorption at the heel part
	FO Fuel oil resistance sole
	WRU Water penetration resistant upper
	HRO Heat resistant outsole
	CI Cold insulation of the sole

The Esolight 1.0 polyurethane midsole made of low-density micro-cells increases energy absorption and provides a correct body weight distribution while walking.

### V-01

- Maximum resistance and durability
- Air circulation system for better breathability
- Perforated front part, with a ripped design to improve breathability

