



QUATTRO

245U-007 S3 ESD SRC

Standard EN ISO 20345:2011


DGUV 112-191

Sizes 35-48



Three-dimensional Spyder-Net lining with moisture absorption and release properties. Its special three-dimensional and non-deformable textile structure ensures lasting comfort, breathability and elasticity.

TYRE dual density PU guaranties excellent flexibility and lightness.

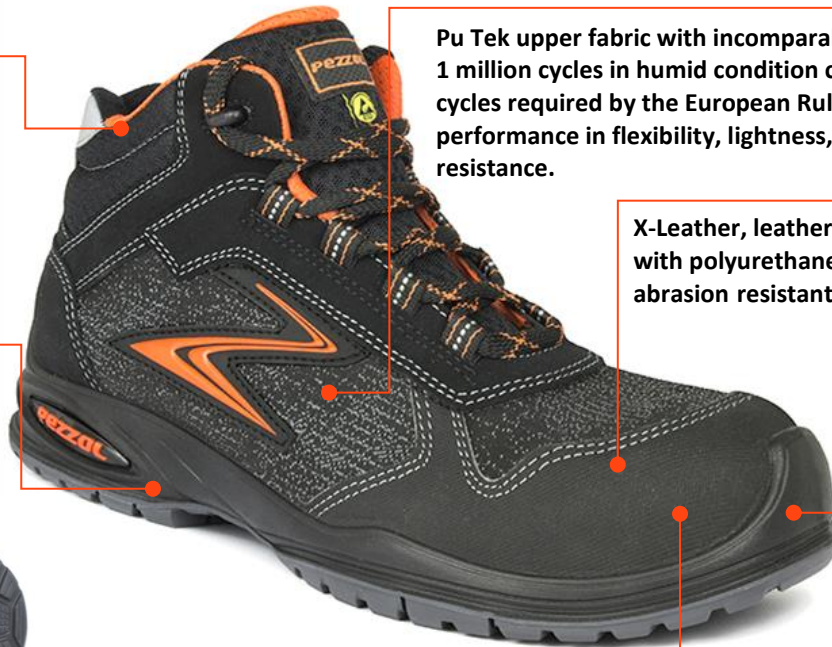

Pu Tek upper fabric with incomparable abrasion resistance: over 1 million cycles in humid condition compared to the 51.200 cycles required by the European Rule, despite preserving its performance in flexibility, lightness, breathability and water resistance.

X-Leather, leather upper material reinforced with polyurethane multi-layer, high abrasion resistant.

Ultra-light and flexible sole with Smart Injection: a special technology that, through the combination of a peculiar mold build-up and the injection of PU Esolight 2.0 compound, provides for different densities and at the same time guaranties lightness, flexibility and durability.

	SRC Slip resistance
	A Antistatic
	P Perforation resistance
	Resistant to an impact of 200 Joules and compression of 15Kn
	E Energy absorption at the heel part
	FO Fuel oil resistance sole
	WRU Water penetration resistant upper

TYRE PU DUAL DENSITY

- SRC Slip resistance sole.
- Fuel oil resistance sole (FO)
- Smart Injection technology
- Excellent abrasion resistance

Alu200 aluminum toe cap and anti-puncture Txzero textile insert for extreme lightness, protection and flexibility.



T-01

- Anatomic insole for more comfort
- Supporting PU foam – Dissipation and Energy Return
- Fully lined with conductive micro-perforated fabric to reduce foam wearing

