



## VOYAGER

980S-003 S3 SRC








Standard EN ISO 20345:2011

Sizes 36-48

ESOLIGHT TXZERO


COMPO 200

METAL FREE

-  SRC Slip resistance
-  A Antistatic
-  P Perforation resistance
-  Resistant to an impact of 200 Joules and compression of 15Kn
-  E Energy absorption at the heel part
-  FO Fuel oil resistance sole
-  WRU Water penetration resistant upper

Three-dimensional Spyder-Net lining with moisture absorption and release properties. Its special three-dimensional and non-deformable textile structure ensures lasting comfort, breathability and elasticity.

SOLID dual density PU guaranties excellent comfort and lightness.

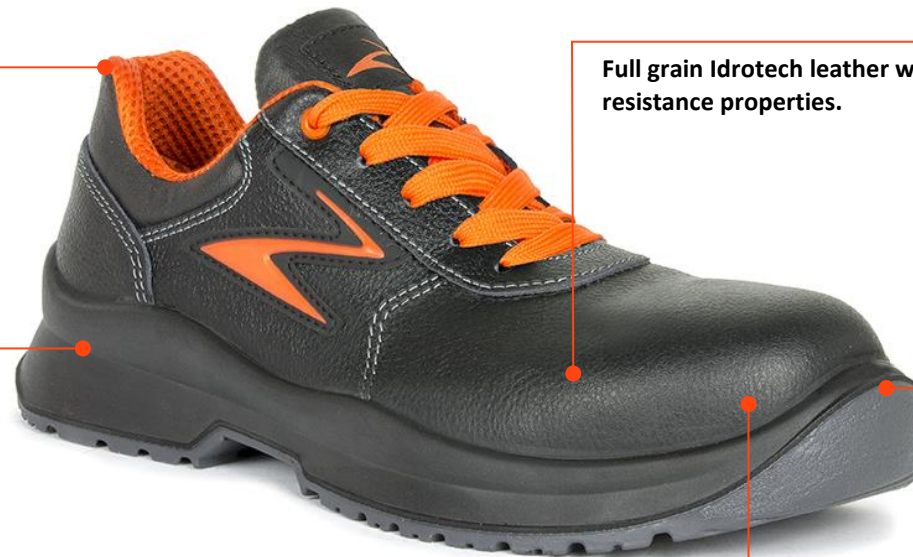

Full grain Idrotech leather with high water resistance properties.

The Esolight 1.0 midsole is made of lower density micro-cell polyurethane so to increase energy absorption, while the outsole is made by high-density Esolight polyurethane to guarantee durability and slip resistance.



### SOLID PU DUAL DENSITY

- SRC Slip resistance sole.
- Fuel oil resistance sole (FO)
- Esolight 1.0+2.0 compound
- Excellent abrasion resistance
- Shock absorbing heel

COMPO200 polymeric toe cap anti-puncture Txzero textile insert for extreme lightness, protection and flexibility.



### S-02

- Antibacterial
- Perforated polyester fabric = maximum breathability Antibacterial
- Honeycomb design for shock absorption and breathability