



MODENA

292S-001 S3 ESD SRC

Standard EN ISO 20345:2011

Sizes 36-48



Three-dimensional Spyder-Net lining with moisture absorption and release properties. Its special three-dimensional and non-deformable textile structure ensures lasting comfort, breathability and elasticity.

SOLID dual density PU guaranties excellent comfort and lightness.



SOLID PU DUAL DENSITY



- SRC Slip resistance sole.
- Fuel oil resistance sole (FO)
- Esolight 1.0+2.0 compound
- Excellent abrasion resistance
- Shock absorbing heel

Full grain Idrotech leather with high water resistance properties.

X-Leather, leather upper material reinforced with polyurethane multi-layer, high abrasion resistant.

Exclusive super flexible system made of dual density polyurethane Esolight 1.0 + 2. 0. The Esolight 1.0 midsole is made of lower density micro-cell polyurethane so to increase energy absorption, while the outsole is made by high-density Esolight polyurethane to guarantee durability and slip resistance.

COMPO200 polymeric toe cap anti-puncture Txzero textile insert for extreme lightness, protection and flexibility.

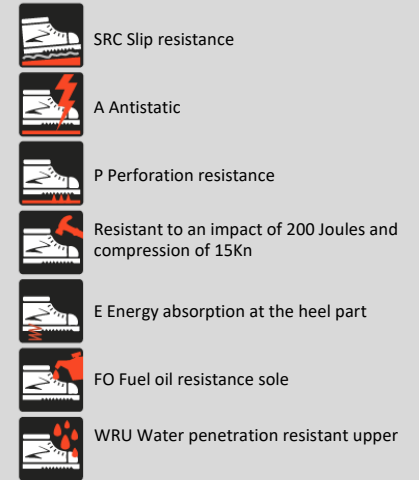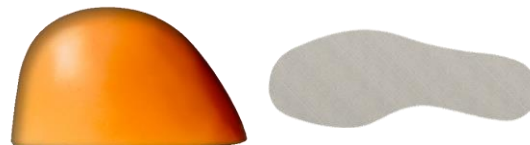

T-01

- Anatomic insole for more comfort
- Supporting PU foam – Dissipation and Energy Return
- Fully lined with conductive micro-perforated fabric to reduce foam wearing

